


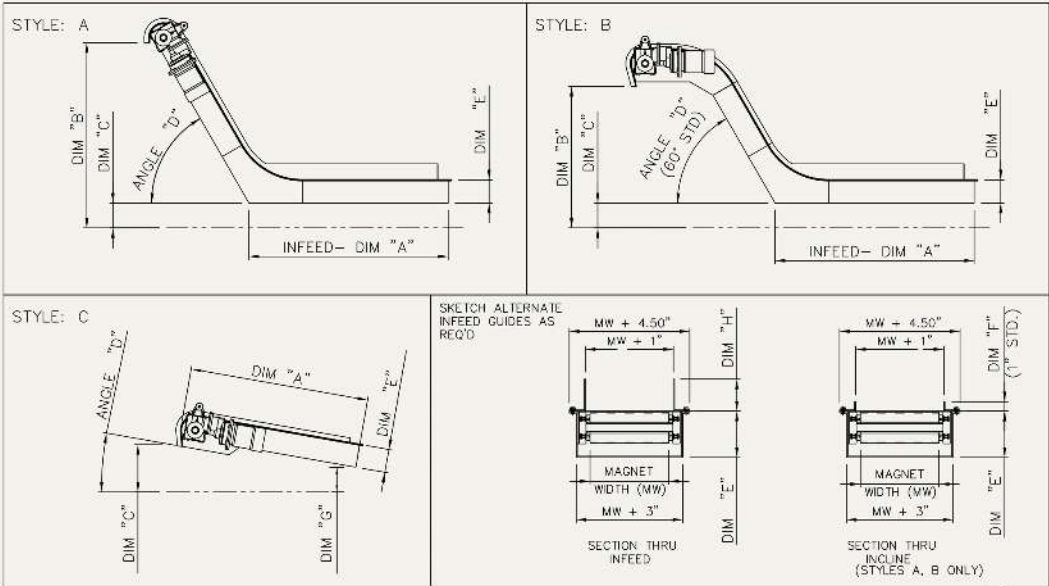

Conveyor Data

Cover Options:

- ☐ 304 SS      ☐ 16 ga (.06")  
☐ Rigidized SS      ☐ 14 ga (.08")  
☐ Manganese      ☐ 12 ga (.105")

Magnet:

- Width: ☐ 11 ga (.120")  
Magnet Ctrs: ☐ 10 ga (.135")  
(12" is Std.)      ☐ 7 ga (.187")

Body Style:

- ☐ A-Style ☐ B-Style ☐ C-Style

Dimensions:

- "A" \_\_\_\_\_ "B" \_\_\_\_\_  
"C" \_\_\_\_\_ "E" \_\_\_\_\_  
"F" \_\_\_\_\_ "G" \_\_\_\_\_  
"H" \_\_\_\_\_  
Angle "D" \_\_\_\_\_

\*Dim. "E" = 5" Standard,  
7" Heavy Duty

Material Data

Material to be Conveyed(Ferrous):

Material Size: \_\_\_\_\_

Temperature: \_\_\_\_\_ ☐ C° ☐ F°

Drop: ☐ Yes ☐ No

How Far: \_\_\_\_\_

Volume: \_\_\_\_\_ lbs/hr

Fluid Present: ☐ Dry ☐ Lubrication Oil ☐ Coolant

Fluid Type: ☐ Oil Based ☐ Water Soluble

Options:

- ☐ Support Leg ☐ Castors ☐ Pump  
☐ Coolant Tank (Cap.Gal. \_\_\_\_\_)  
☐ Filtration System  
☐ "Rigidized" SS Slider Bed \*  
☐ Manganese Slider Bed \*\*

Notes:

---



---



---

|                  |
|------------------|
| COMPANY NAME:    |
| COMPANY ADDRESS: |
| EMAIL ADDRESS:   |
| TEL NO.:         |