

EYELINK BELT SPECIFICATIONS

Belt specification

Length m Material


Width mm

- 1) Pitch
(center to center distance across rods)
- 2) Cross rod diameter
- 3) Wire diameter
- 4) Cross pitch
(center to center distance between links)
- 5) Amount of under wires
(only for DL | standard is 1)
- 6) Amount of bar links per row
- 7) Amount of rows

Belt type

Full eyelink belt (DO) ☐

Eyelink belt with under wire (DL) ☐

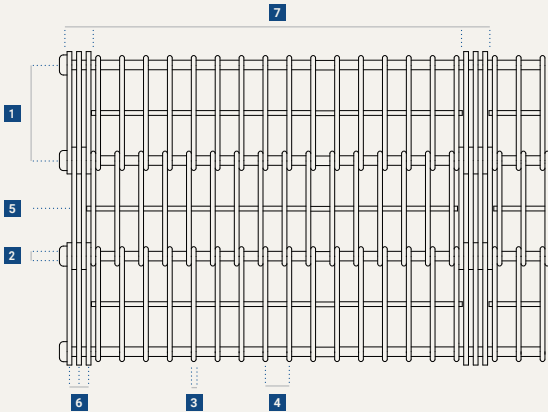

Side finishing

Welded side (LK) ☐ Chain (KH) ☐

Guide plates (GP) ☐ Plastic blocks (KB) ☐

Please add the specification and a photo of the desired side finishing.

Belt options

Guard edge plates ☐ Flights ☐

Please provide the desired height, material and amount of edge plates and a drawing or sketch.

Please provide a drawing or sketch of the desired flight.

Application

Product

Process

Other conditions

Minimum temperature

Maximum temperature

Remarks/Reference *If available, please provide a photo of the current belt.*

COMPANY NAME:		ATTENTION:	
COMPANY ADDRESS:		SPECIAL REQUIREMENTS:	
EMAIL ADDRESS:			
TEL NO.:			